

**SF12CS-HD PIII – THE MONGOOSE SERIES
HIGH TEMPERATURE IMAGING SYSTEM
SPECIFICATIONS**

INDUSTRIAL SYSTEM INCLUDES:

- High-Definition color camera
- Air-cooled 310 stainless-steel furnace lens with Bright Image Optical System™ and G2 quick change design
- High temperature 310 stainless steel camera housing (IP66/NEMA 4X) with slide trac mount (tripod base for portable system)
- Quick change back plate
- 12 VDC power supply with IP66/NEMA 4X enclosure and 15 ft. (4.6 m) cord
- Regulator assembly with 2 ea. 15 ft. (4.6 m) quick disconnect air lines
- External mechanical focus access
- Factory assembled, pre-adjusted and ready for installation

CAMERA:

Sensor: High-Definition Color CMOS
Resolution: High-Resolution HD Digital
AGC: On/off selectable
SNR: Greater than 50dB
Video: NTSC, PAL, and High-Resolution HD Digital formats available
Power: 12 VDC with 100-240 VAC adapter - 50/60 Hz

AVAILABLE LENSES:


Overall length: 12", 18", 24", 28", 36", 48", 65" (30, 45, 61, 71, 91, 122, 165 cm) Straight Ahead Line of Sight
24", 36", 48" (61, 91, 122 cm) Obtuse and Right-Angle Line of Sight
Diameter: 1.650" (42 mm)
Field of view: See Lens Selection Guide (up to 120° D available)
Line of Sight: Straight ahead (standard), Obtuse and Right (also available)
Temperature: Scenes being monitored to 3500° F (1927° C)
Air Purge: 15-25 psig @ 20-40 scfm - straight ahead line of sight lens (**application dependent**)
Instrument quality air only T<100°F (40°C)

ENCLOSURE:

Material: PHASE III = **STEELON™** (310 stainless steel with 10mm high temperature synthetic insulation)
Temperature: Ambient temperatures to 550° F [289° C] (with optional accessories)
Air purge: 3-10 psig @ 3-10 scfm (**application dependent**)
Instrument quality air only T<100°F (40°C)

OPTIONS AND ACCESSORIES INCLUDE:

- SAM0007-XX or SAM0012-XX Wallbox
- MSS0010C Automatic Retract
- Video Monitor
- Automatic Port Deslagger
- SAM0009 or SAM0028 Air Filtration System
- Video Recording
- Coaxial Cable, Fiber Optic, or Ethernet Transmission System
- Quick-change Lens

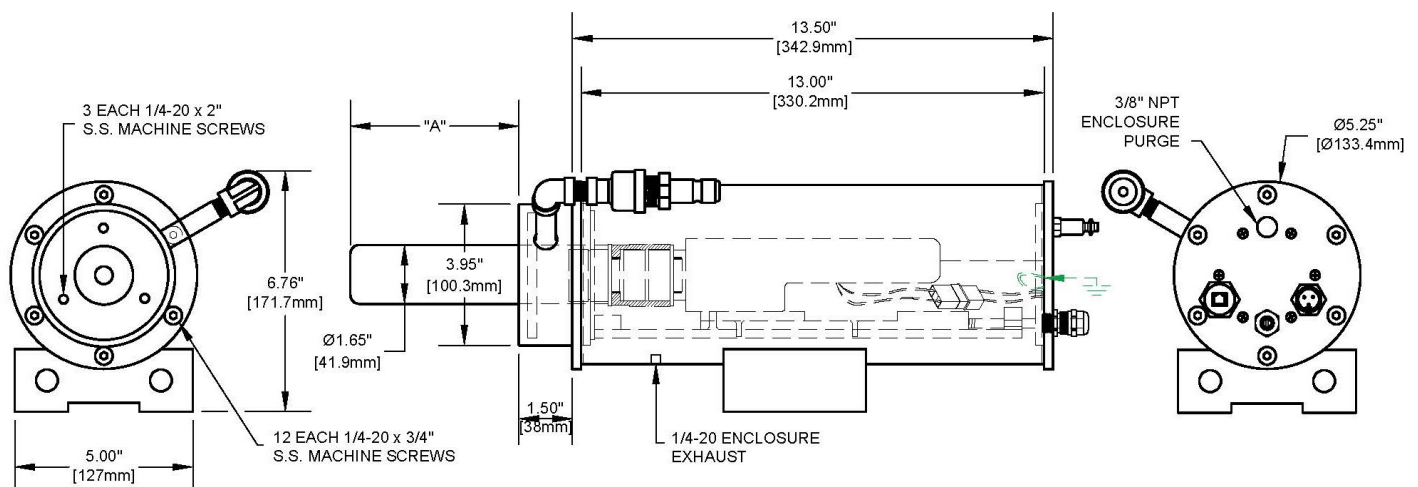

SYN-FAB® INC.

HIGH TEMPERATURE & INDUSTRIAL PROCESS MONITORING SYSTEMS

7863 SCHILLINGER PARK ROAD • MOBILE, ALABAMA 36608 • USA

PH: (251) 633-4942 • FX: (251) 633-2514 • E: info@synfab.com

5/2025